



USBEL180
Design by Manuel Vivian

Collection consisting of suspended lamps with a metal frame covered with strips of extra smooth flame-retardant pongé fabric. Available in several colors and sizes.

Typology: SUSPENDED

Ratings

- Downlight and uplight
- Installs over 4 in. octagonal J-box (support independently)
- Power supply 120V AC
- Switch mode: on-off
- Steel frame
- Opalescent diffuser

L10 BUILT IN LED MODULE VERSION

- CCT 3000 K, CRI 90
- Power supply 120/277V AC
- Dimmable ELV 0-10V

GU24 LED VERSION


- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut

FLE VERSION

- Power supply 120/277V AC

Product code composition

BELL / diffuser INCLUDED, with upward and downward lighting

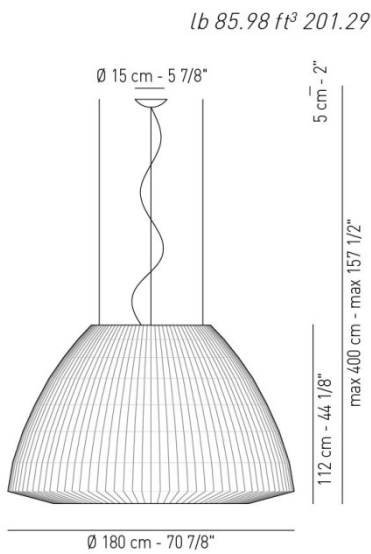


Type	Article	Colours	Finish	Source
US	BEL 180 E26	BC white	XX	E26 5 x Max 17W LED or 5 x Max 26W fluo
	BEL 180 FLE	BL electric blue		FLE GX24q-4 5x42W 120/277Vac
	BEL 180 LED	BW warm white		LED GU24 5x15W - included 120VAC - CRI80 diffused beam - 2700K 8000 lm - 107 lm/W
		GI gold yellow		dim. LED TRAILING EDGE PHASE CUT
	BEL 180 L10	MA brown		L10 95W LED - integrated 120/277Vac - CRI90 diffused beam - 3000K 10700 lm - 113 lm/W
		MT brick red		dim. LED 0-10V
		NE black		
		RB burgundy		
		RS red		
		VE green		



DRY LOCATION

example composition code | US | BEL180E26 | RS | XX

Available colors

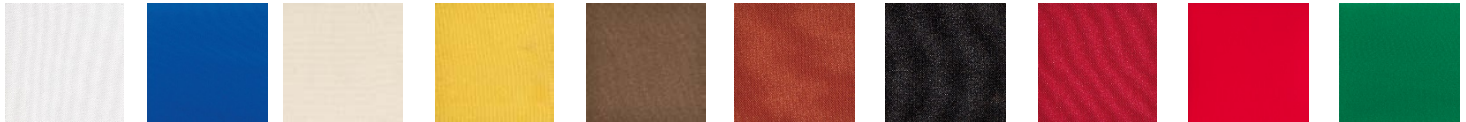

BC White BL Electric blue BW Warm white GI Gold yellow MA Brown MT Brick red NE Black RB Burgundy RS Red VE Green

USBEL180_ _ _ _ _ XX CUSTOMER _____ NOTES _____

NOTICE: Luminous flux for all LED luminaires is shown at source level. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.